

1. Introduction

High strength alloy casing, Anti-fingerprint,
Tempered glass panel, LED light(night using),
Classy and trendy


2. Cable

No.	Col.	Descrp.	Details
1	red	12~36V	Supply power
2	black	AC/DC	
3	brown	NC	Normal Close
4	blue	COM	COM
5	purple	NO	Normal Open

3. Data


Material	High process vacuum plating alloy
Thickness	2.0 anti-fingerprint tempered glass
Power	AC/DC 12~36V
LED color	blue / bright green
Static Current	22mA (DC12V)
Max. Current	58mA (DC12V)
Feel distance	1~15cm adjustable
Frequency	38KHZ
Temp.	-10°C~70°C
Humidity	5~70%
Dimension	86mm*86mm*7mm
Mounting hole	60mm

4. Wiring

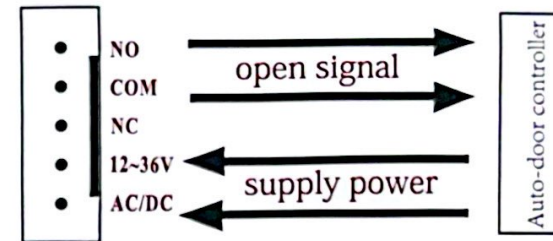


1. Don't care Positive + and Negative -
2. Wiring according to cable colors and instruction
3. Double check and test

5. Induction(feel) distance



Clockwise distance becomes longer ,
Counterclockwise distance becomes shorter,
Max. 15cm

6. Mounting diagram

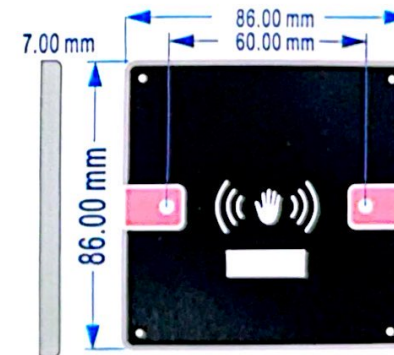

White rectangle is induction area

Note: 86 box concealed is needed for installation.